
China Print Supplies

EPSON SERIES
Direct Textile Printer
1.8m / 3.2m

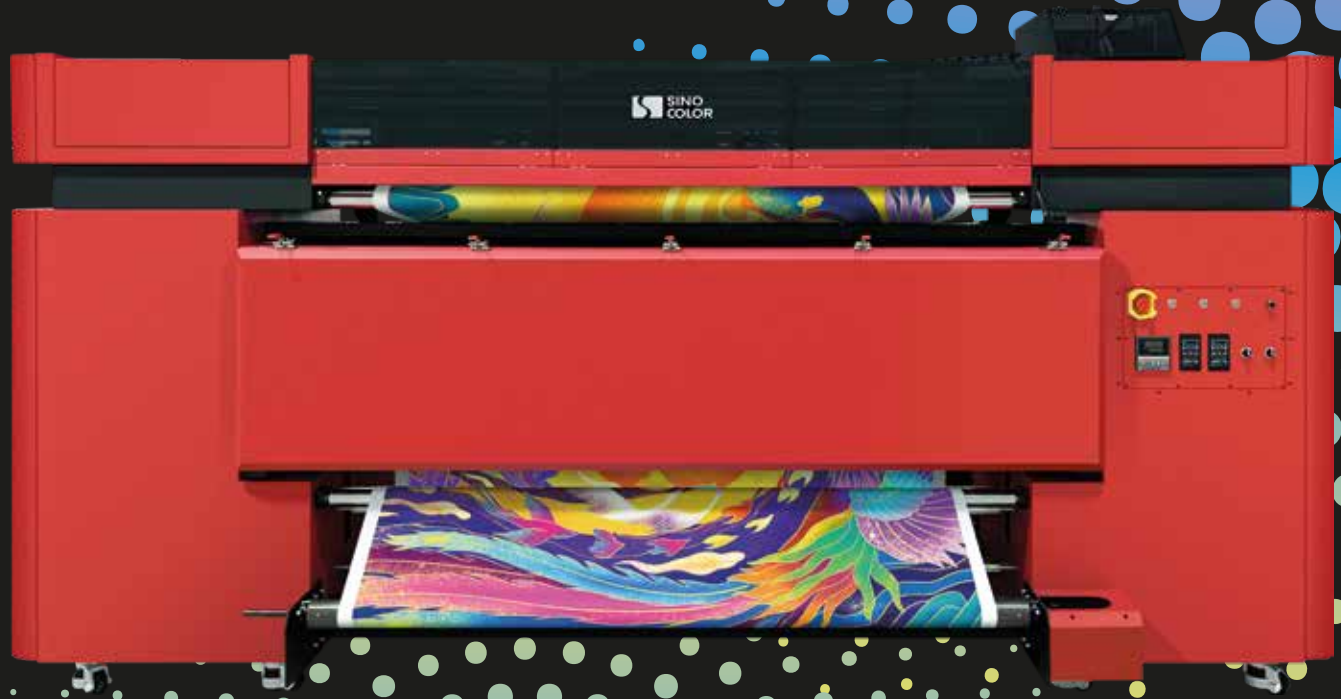

2-4 Printheads

Variable Dot

CMYK

Plus optional fluorescent inks

chinaprintsupplies.co.uk

Direct Textile Printer | FP-740 & FP-1260




High-density ink produces rich, vibrant colors.



- Industry Leading Rip Software

DigitalFactory 11
DesignPro Edition

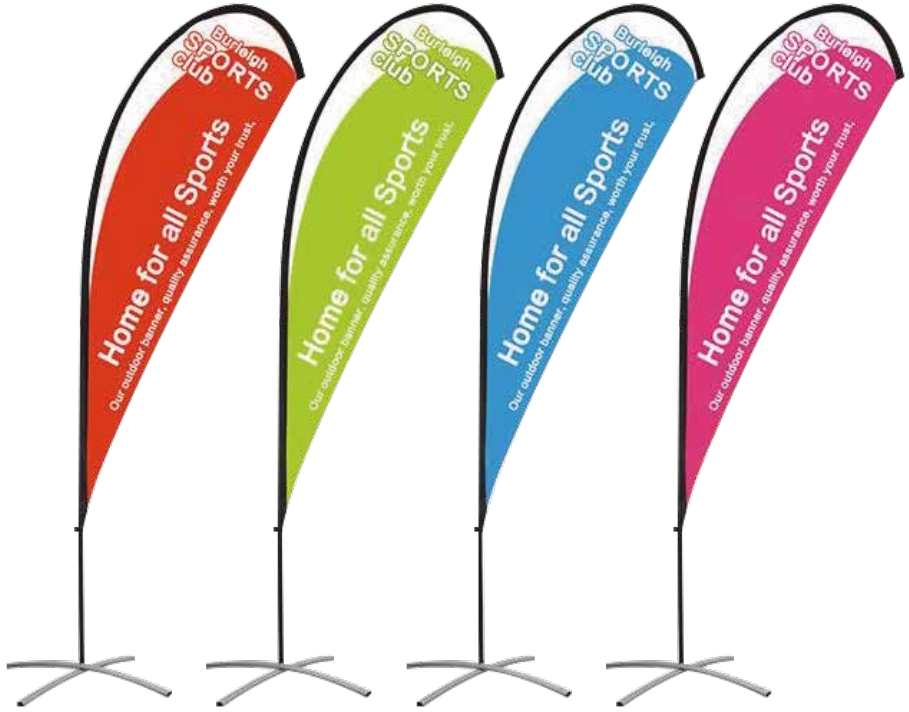

High quality heating elements produce stable consitent temperature for consitent print results.

Tension Media feed and takeup system ensures flat smooth printing on all media types.

Direct Textile Printer | FP-740 & FP-1260

Features


Epson PrecisionCore Printhead

Equipped with Epson i1600/i3200 printhead, powered by Epson PrecisionCore technology. Born for fast speed and long-term running.



Integrated Design

The professional integrated design of printer part and heater guarantee high accuracy of media stepping



Tension Media Feeding and Take-up System


Suitable for all media types.



Anti-collision system

Printer will automatically pause if the carriage hit any unexpected object without losing the job.

VSDT



Variable Sized Droplet Technology

Ensures smooth color gradations and high quality output.

Specification

Model No.		FP-740D (Pro)	FP-740S (Pro)	FP-1260S (Pro)
Printhead	Type	2/4 Epson i1600	2/4 Epson i3200	2/4 Epson i3200
	Nozzles	1600 Nozzles Per Head	3200 Nozzles Per Head	3200 Nozzles Per Head
	Height	2-8mm Above Media Adjustable		
Max Printing Width		1.8m	1.8m	3.2m
Resolution (dpi)		2400 dpi		
Media Types		Polyester (For flag, display board, light box, etc)		
Ink	Type	Dye Sublimation Ink		
	Color	CMYK		
	Droplet	1.5 – 21pl Variable		
Speed (4 heads)	Draft	108 m^2/h	120 m^2/h	150 m^2/h
	Production	54 m^2/h	60 m^2/h	75 m^2/h
	Quality	36 m^2/h	40 m^2/h	50 m^2/h
Feed & take up		Automatic Tension Type Media Feeding & Take-up System (Standard)		
Cleaning		Automatic Cleaning, Anti-Clogging Flash Function & Capping System		
Fabric Drying System		Infrared Heater		
Environment		Temperature: 20-28℃, Humidity: 40%-60%		
Rip Software		Maintop (Standard) / FlexiPRINT (Optional)		
Control Software		SinoColor Print Console		
Interface		USB 3.0		
Operation System		Windows 7/ XP/ 10		
Power		AC 110/ 220V, 50/ 60Hz, 6000W (FP-740), 8800W (FP-1260)		
Size & Weight	Machine	L3760×W1140×H1720 mm / 790KG; L5130×W1270×H1730 mm / 1000KG (FP-1260)		
	Packing	L3840×W1240×H1900 mm / 950KG; L5240×W1370×H1900 mm / 1200KG (FP-1260)		

Specifications are subject to change without notice.

Direct Textile Printer | FP-740 & FP-1260

	Model	Print Head	Color	Max Print Size	Resolution	Speed
	FP-740D	2 × Epson i1600	CMYK	1.8m	2400dpi	Draft: 57 m^2/h Production: 28 m^2/h High Quality: 19 m^2/h
	FP-740S	2 × Epson i3200				Draft: 64 m^2/h Production: 32 m^2/h High Quality: 21 m^2/h
	FP-740S Pro	4 × Epson i3200				Draft: 120 m^2/h Production: 60 m^2/h High Quality: 40 m^2/h
	FP-1260S	2 × Epson i3200	CMYK	3.2m	2400dpi	Draft: 80 m^2/h Production: 40 m^2/h High Quality: 25 m^2/h
	FP-1260S Pro	4 × Epson i3200				Draft: 150 m^2/h Production: 75 m^2/h High Quality: 50 m^2/h